


The Load Insulator® is a life saver.

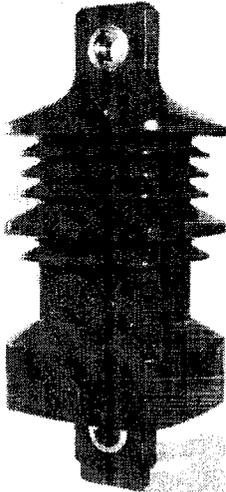

Electrocution from power line contact is the biggest single cause of death and injury in the crane industry - OSHA

State of the Art Announcement

“We all know that most crane fatalities are caused by accidental power line contact. There has not been an insulated link which we could trust to work under the variety of conditions found in the construction industry. There is now – the Load insulator®”

Timothy J Conlon
Senior Vice President & General Manager
Special Risk Services Group Inc.


The Load Insulator® is a self-testing safety device that protects ground personnel, in contact with the load, from injury or death in the event of a crane making contact with overhead energised power lines.

Performance

Load Capacities 10t and 55t

Environmental

Temperature -40°C to +60°C
Lightning Not lightning proof

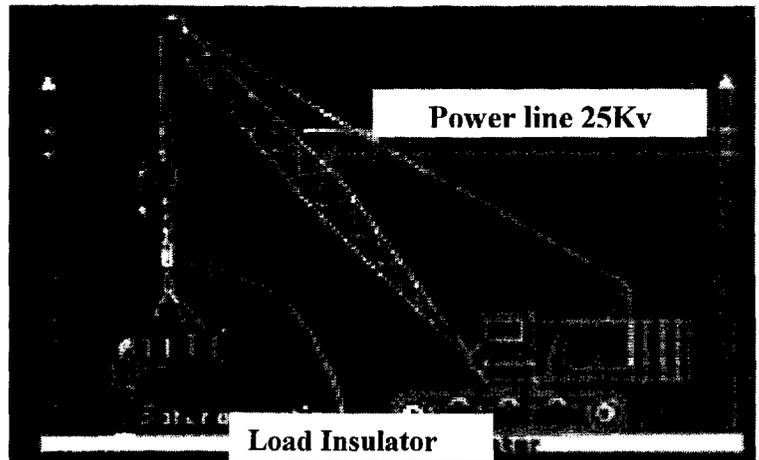

Electrical

Rating 25kV rms
Proof Test 120% of Rating
Leakage Current < 2mA at 25kV, dry IEC 479-2
Lightning Strike Not lightning proof
Warning Device Via Onboard Diagnostics

Mechanical

Proof Load 200% of capacity
Ultimate Load 500% of capacity
ISO M5 duty rating

For further information contact:

InsulatUS inc. 708 Marks Road, Suite B, Valley City, Ohio 44280

Tel: 1-888-323-5623

e-mail: sales@insulatus.com

www.insulatus.com

Fax: 1-888-323-1733

LOAD INSULATOR



LOAD MONITOR Ltd



