

PRESS RELEASE

MANITOU

**Manitou offers the NEW Millennium Series
MRT Rotating Telescopic Handlers**
The Three-in-One Telescopic Handler

October 2003 – Waco, Texas. Manitou North America expands its MRT range with two new models. The MRT 1432 is the new entry level model with 6,500 lb. basic capacity and 45 feet of lift height. At the top is the new MRT 2150 with 10,000 lb. basic capacity and 68 feet of lift. The MRT's rotating capability makes it the most exciting concept in telescopic construction machines today.

With a hydrostatic transmission and joystick controllers, loads can be placed with effortless precision. Additionally, the MRT's Quick Fit attachment system and standard auxiliary hydraulics allow the user to incorporate optional attachments such as a work platform which is totally controlled by the operator from the platform; as well as hook jibs, winches, concrete hoppers, and underbridge baskets. The same operator friendly features: 360° visibility and an ergonomic cab found on Manitou's other Maniscopics are also present on the MRT.



Press contact: Debbi Brown - 800-433-3304 x103
e-mail: dbrown@manitou-na.com
www.manitounorthamerica.com

MANITOU NORTH AMERICA

SELECT YOUR FAVORITE MANITOU SERIES →

VERTICAL MASTED LIFT TRUCKS



TELESCOPIC HANDLERS



TRUCK MOUNTED FORKLIFT




MASTS AND KURB DRESSERS



CONSTRUCTION TELESCOPIC HANDLERS

MRT 2150

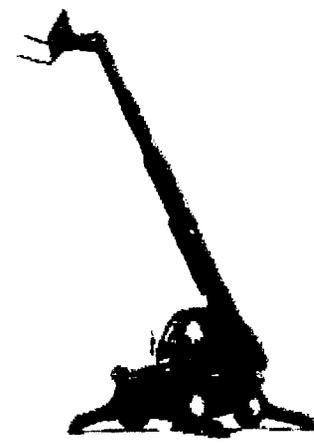

[Click Here for Technical Specifications](#)

MRT 2150

CONTINUOUS ROTATION TELESCOPIC HANDLER

Search

The MRT 2150 is a 10,000-pound base capacity unit with 68' of lift height. A hydrostatic transmission, fully enclosed cab, continuous rotation, load moment indicator, stabilizers, frame leveling, auxiliary hydraulics, fenders and road lights are standard.


FEATURES

BENEFITS

<ul style="list-style-type: none"> • 10,000 Lb. Capacity, 67' Lift Height • 4 Wheel Drive • Rough Terrain Capability • Oscillating Rear Axle 	<p>Designed for High Performance</p>
<ul style="list-style-type: none"> • Fast, Responsive Hydraulics • Ergonomic Cab Layout • Load Moment Indicator 	<p>Comfort and Convenience</p>
<ul style="list-style-type: none"> • Three Steering Modes • Tight Turning Radius • Side-Mounted Engine 	<p>Compact and Maneuverable</p>
<ul style="list-style-type: none"> • Multi-Purpose Machine • Wide Choice of Attachments • Continuous Rotation 	<p>Versatile</p>
<ul style="list-style-type: none"> • Easy Engine Access • Quality Components • Anti-Vandalism Package 	<p>Ease of Maintenance</p>

APPLICATION PHOTOS


Seeing is believing. Click on the thumbnails below to view larger product photos.



HANDLING



LIFTING



PERSONNEL ELEVATION

OPTIONAL EQUIPMENT

For options not listed, contact Manitou.

Carriages to 60" Wide	1.25 cu. yd. Bucket
Fork Lengths to 72"	Under Bridge Attachment
Platform: 800 lb. Capacity, 7'-13' Wide	Concrete Hopper
Winch: 3 ton Capacity	Hook Jib: 1,300 lb. Capacity

[BACK TO TOP](#)

2003 Manitou North America. All rights reserved.